

HomeDVR-KT1B Quick Start Guide

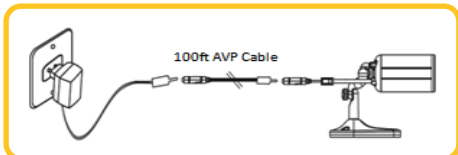
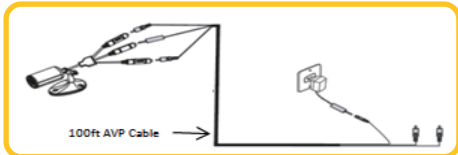
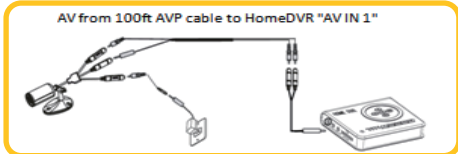
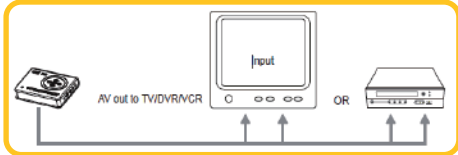
One Weatherproof Bullet Color Camera w/100ft Cable and SD DVR

Package Contents



HomeDVR, Remote Control, Camera (SM-302), 100ft AVP Cable, 2 AC Adapters & Accessories.

Installation

- i) Connect one end of the 100ft power receptacle to the camera's power input socket. Connect the A/C adapter (8VDC 300mA) to the other end of the 100ft cable and then connect the power adapter to an electrical outlet as shown to the right.
 
- ii) Next, connect one end of the 100ft AVP cable to the camera's yellow (video) socket and red (audio) socket as shown to the right.
 
- iii) Using one of the AV cable's provided, connect the 3.5mm jack into the HomeDVR "AV IN 1" port and use the opposite end (yellow/white) to connect the camera to the DVR. Connect the camera's red audio socket to white and yellow to yellow of the 100ft AVP cable [RCA (f) to RCA (f) adapter apply] as illustrated on the right.
 
- iv) Connect the AV (audio/video) cable from the AV output of the HomeDVR to a monitor or a recorder source (ie. CCTV monitor, LCD monitor, TV, DVR, recorder, & etc). Turn on the monitor source and change the channel on the monitor to AV input (ie. LINE1, LINE2, VIDEO1, VIDEO2, & etc.), as illustrated to the right.
 
- v) Insert an SD card into the SD card slot of the HomeDVR and then turn the power switch to the ON position.

NOTE: Please refer to the user's manual for information on how to use and configure the HomeDVR. SD card not included.