

LED Emergency Road Flare



Package Contents



MEFLARE3 (3pcs)



Storage bag




Batteries (9xAAA)



Reflective Vest



User's Manual

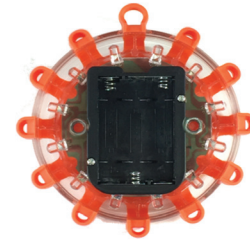

Specifications

Strobe LED's	12 (red)
Flashlight LED's	3 LED (white)
Power Requirements	3 AAA Batteries (Included)
IP Rating	IP66
Weight tolerance	6000 lbs
Dimensions	3.75" x 4" x 1.25"
Weight	Gross: 1lbs / Net: .60lbs

Introduction

Road side flares and strobe lights are an essential tool for police, firefighters, construction workers and roadside mechanics. The SecurityMan MEFLARE3 equips the everyday civilian with the same essential tool. It is equipped with 12 LED's, 5 user-selectable flashing patterns, 4 solid patterns, an LED flashlight and a scratch-proof magnetic hold making it ideal for bringing attention to any accident or emergency situation at night, in bad weather, on land and on water (non submergible).

Features



- 360° of super bright LED's
- 9 different patterns including SOS Morse Code
- Up to 40 hours of usage (single flash mode)
- Superior visibility: LED arrays can be seen up to 1 mile
- Magnetic scratchproof design. Attaches to any metal surface without scratching it.
- Waterproof (IP66) and floats
- Crush and corrosion proof
- Multipurpose: road flare, emergency beacon, camping, outdoors, and boating applications (not submergible)
- LED flashlight with hanging hook
- High visibility safety vest

Important

This guide provides important information on the use and operation of your MEFLARE3 and the images/features shown throughout the manual are subject to change without notice due to system and firmware upgrades. Please read all the information carefully prior to using the product for the best performance and to prevent any damage/injuries or misuse of the device(s). Customers are entitled to have read through this complete user's manual before using the MEFLARE3. Any unapproved changes or modifications will void your warranty. Please ensure to have a complete understanding of the following restrictions.

- Please take extra precaution when exiting your vehicle onto roads, highways and freeways.
- The MEFLARE3 has an IP rating of IP66 and is protected from high pressure water jets from any direction. It is light enough to "float" on water when needed and should not be submerged under water for long periods of time.
- Make sure that all screws are screwed in tightly after inserting and replacing batteries.
- Please use this as a tool. Do not use the MEFLARE3 to impersonate police officers.

Product Basics

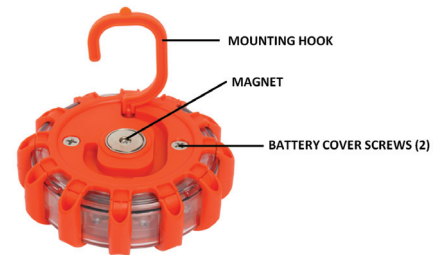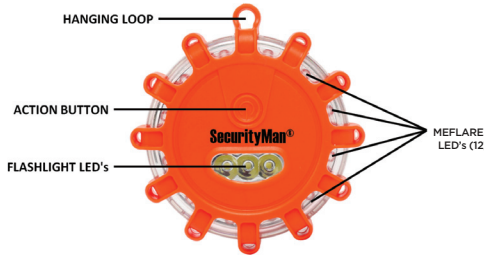

ACTION BUTTON

The action button has several functions.

- **Quick double press:** Turns the main LED flashlight on and off.
 - **Single press:** Turns the unit on and rotates between the 9 different LED modes.
 - **Press and Hold:** Pressing and holding the action button (while on) will perform a hard shutdown and preserve the current LED mode so that it is the first mode at the next start up.
- *Pressing and holding the action button will not turn it on.

Setup

1. Using a Phillips screw driver, remove the 2 battery cover screws. *Do not remove the magnet screw.
2. Take note of the polarity symbols (+ and -) marked inside and insert 3 AA batteries into the battery compartment.
3. Align the battery cover tabs back on top of the MEFLARE3 and re-attach the battery cover by firmly tightening the 2 screws.

LED PATTERN	BATTERY LENGTH
Rotating	7 Hours
Quad Flash	7 Hours
Single Flash	40 Hours
Alternating Flash	7 Hours
SOS (Morse Code)	10 Hours
Solid-High	4 Hours
Solid-Low	28 Hours
2 LED Flashlight	7 Hours
4 LED Flashlight	4 Hours
Main LED Flashlight	8 Hours

© Copyright 2018

This manual is furnished under license and may be used or copied only in accordance with the terms of such license. Except as permitted by such license, no part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or any means, electronic, mechanical, recording, or otherwise, including translation to another language or format, without the prior written permission of SecurityMan. The content of this manual is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by SecurityMan. SecurityMan Inc assumes no responsibility or liability for any errors or inaccuracies that may appear in this book.

FCC Information

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warranty

SecurityMan Inc warrants that this product will be free from defects in title, materials and manufacturing workmanship for one year or otherwise specified on the product packaging. This limited warranty shall commence from the date of purchase. SecurityMan products warranty is not transferable and is limited to the original purchaser. If the product is found to be defective then, as your sole remedy and as the manufacturer's only obligation, SecurityMan will repair or replace the product. This warranty shall not apply to products that have been subjected to abuse, misuse, abnormal electrical or environmental conditions, normal wear and tear, or any condition other than what can be considered normal use.

If you encounter any difficulty in the operation of this product after reading the manual, please feel free to contact us. You can reach us by phone at 1-888-977-3777 from 8:30 AM to 5:30 PM Monday through Friday (Pacific Standard Time) or by email techsupport@securitymaninc.com. We will be happy to answer your questions and help you in any way we can.